


SWACO MAMUT

Shaker Screen Replacement

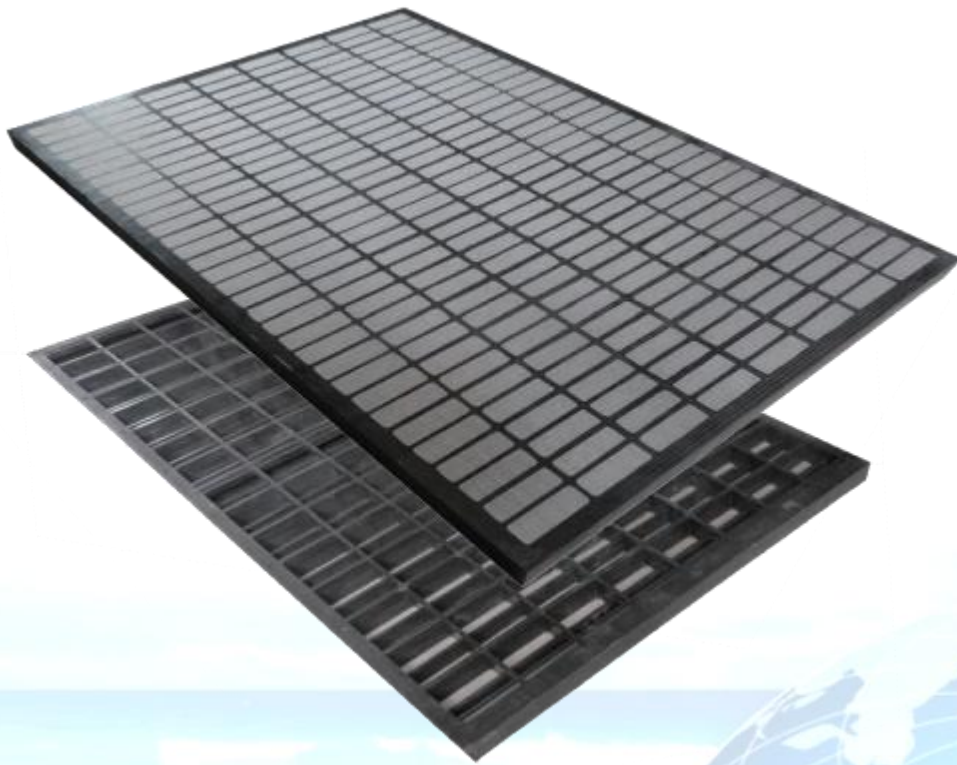


Compatible shale shakers


- M-I SWACO MAMUT shale shaker.

Technical Parameter

- **Model No.:** TP-MAMUT.
- **Material:** stainless steel 304/316/316 L.
- **Frame Material:** composite.
- **Standard:** API RP 13C.
- **API RP 13C Designation:** API 20 – API 325.
- **Series:** XL, XR.
- **Warranty Period:** 1 year.
- **Working Life:** 400 –450 hours.

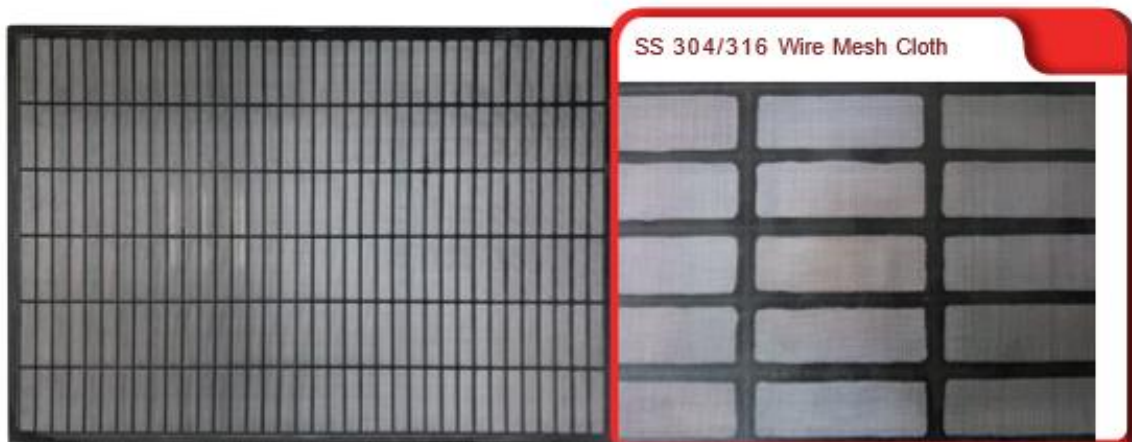


Positive Side

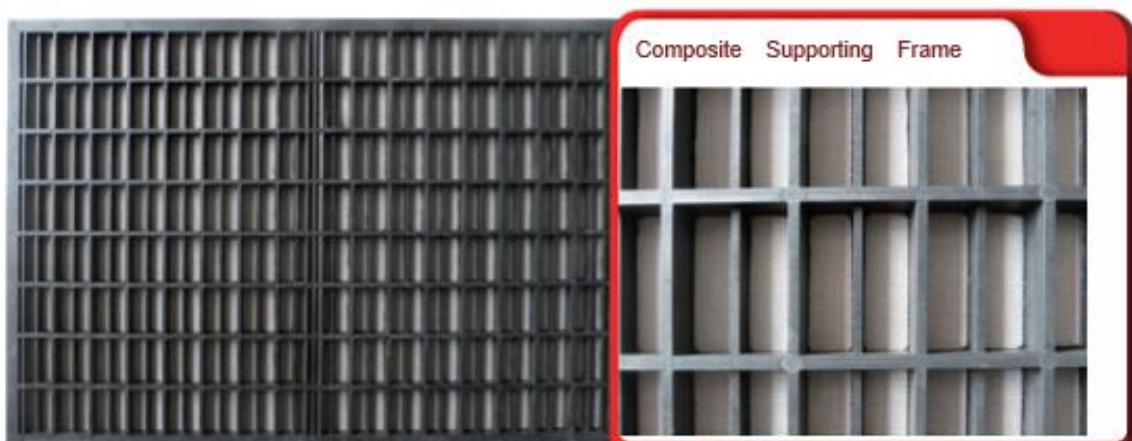

Reverse Side

TP-MAMUT-A325

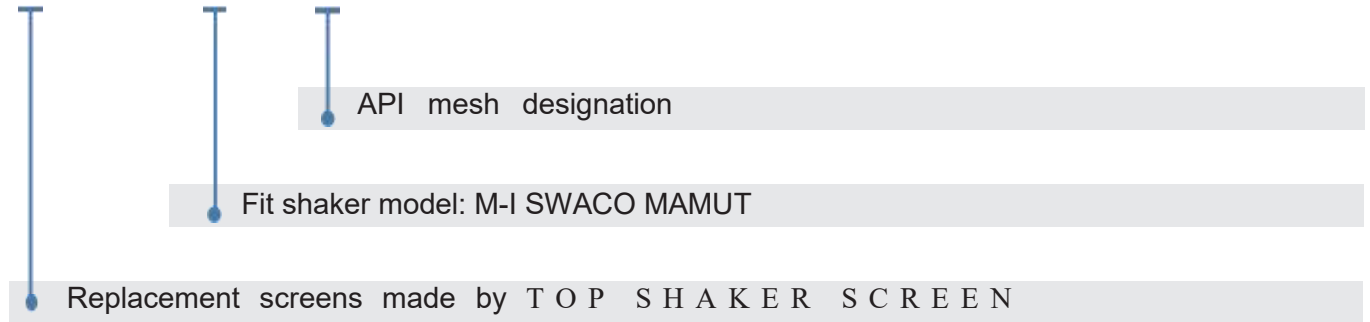

Performance Parameter

Screen Designation	Mesh Type	API RP 13C Designation	Conductance Number	D100 Separation (microns)	Non-Blank Area (sq.ft)
TP-MAMUT-A325	XR	API 325	0.39	44	5.5
TP-MAMUT-A270	XR	API 270	0.67	57	5.5
TP-MAMUT-A230	XR	API 230	0.71	68	5.5
TP-MAMUT-A200	XR	API 200	1.32	73	5.5
TP-MAMUT-A170	XR	API 170	1.34	83	5.5
TP-MAMUT-A140	XR	API 140	1.89	101	5.5
TP-MAMUT-120	XR	API 120	1.89	134	5.5
TP-MAMUT-A100	XR	API 100	2.66	164	5.5
TP-MAMUT-A80	XR	API 80	2.76	193	5.5
TP-MAMUT-A70	XR	API 70	3.33	203	5.5
TP-MAMUT-A60	XR	API 60	4.1	268	5.5
TP-MAMUT-A50	XR	API 50	5.17	285	5.5
TP-MAMUT-A40	XR	API 40	8.64	439	5.5
TP-MAMUT-A35	XR	API 35	9.69	538	5.5
TP-MAMUT-A20	XR	API 20	10.88	809	5.5

* D100: Particles this size and larger will normally be discarded.

* API: Corresponding API sieve equivalent as per API RP 13C.

* Conductance No.: This represents the ease with which a liquid can flow through the screen. Larger values represent higher volume handling.